



Models 6-S-254, 6-S-256 (5644 Chassis)

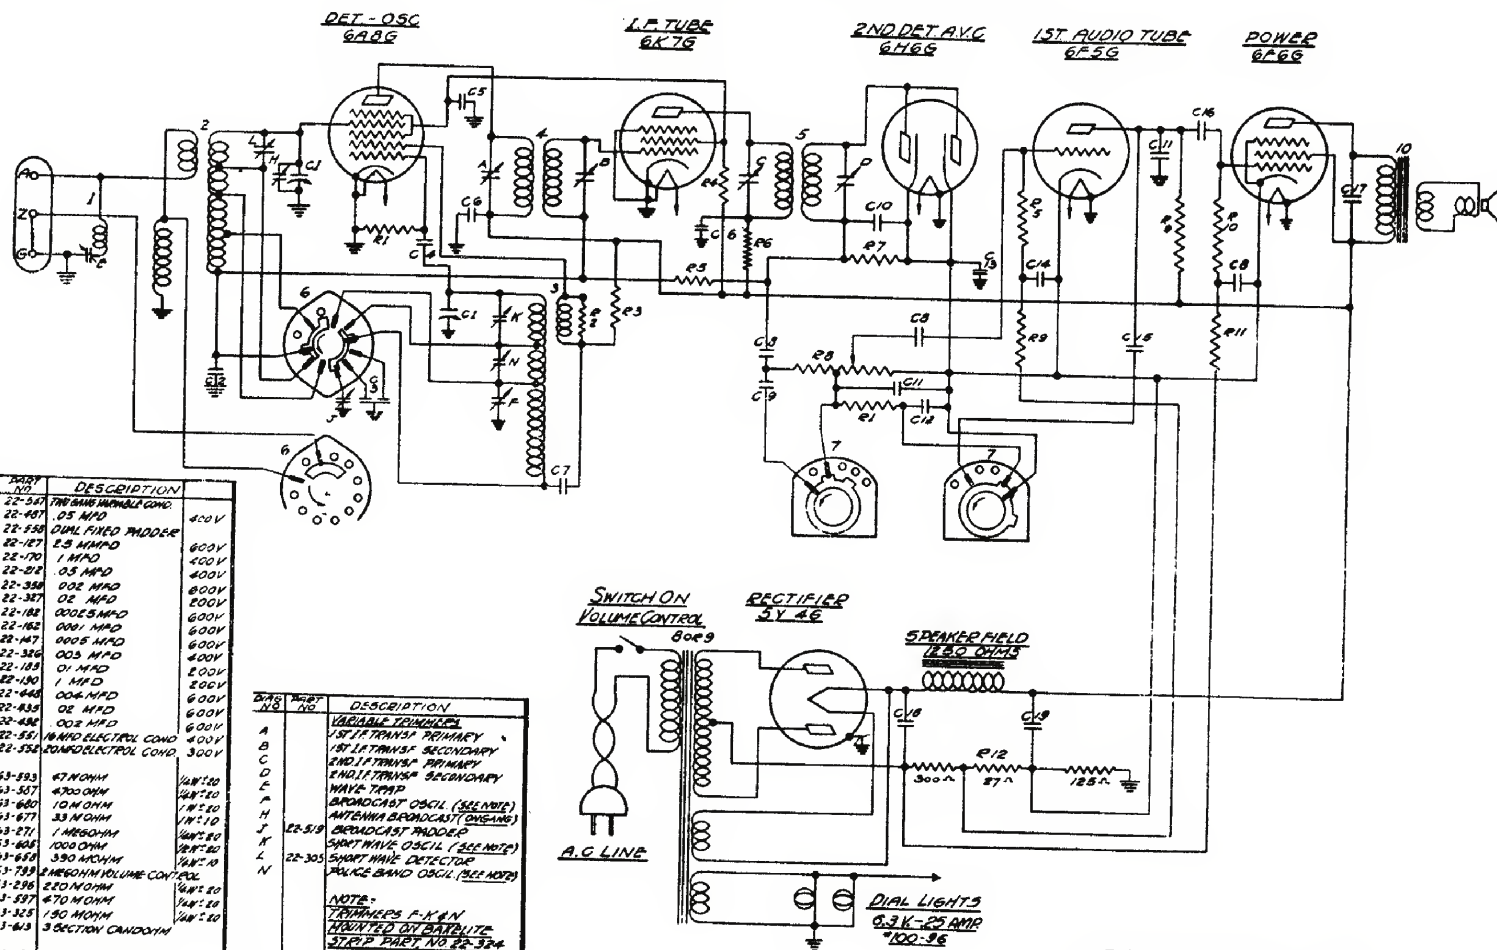

WAS NO.	REPT NO.	DESCRIPTION
C1	22-347	100MVAR VARIABLE COND.
C2	22-407	0.5 MFD
C3	22-550	DUAL FIXED TUNING
C4	22-127	5.3 MFD
C5	22-170	1 MFD
C6	22-212	0.5 MFD
C7	22-330	0.02 MFD
C8	22-327	0.2 MFD
C9	22-182	0.001 MFD
C10	22-182	0.001 MFD
C11	22-147	0.005 MFD
C12	22-326	0.03 MFD
C13	22-182	0.1 MFD
C14	22-120	1 MFD
C15	22-440	0.04 MFD
C16	22-435	0.2 MFD
C17	22-435	0.02 MFD
C18	22-551	100MVAR ELECTROL COND.
C19	22-552	100MVAR ELECTROL COND.
R1	63-593	47,000 OHM
R2	63-597	4700 OHM
R3	63-600	100 OHM
R4	63-677	33,000 OHM
R5	63-671	1 MEG OHM
R6	63-605	1000 OHM
R7	63-650	330 OHM
R8	63-789	2 MEG OHM VOLUME CONTROL
R9	63-598	220,000 OHM
R10	63-597	470 OHM
R11	63-525	150 OHM
R12	63-613	3 SECTON CARBOHYM
1	20-154	WAVE TRAP ASSEMBLY
2	15-5073	ANT COIL & SHIELD ASSEM
3	15-5074	OSCIL COIL & SHIELD ASSEM
4	95-416	1ST I.F. TRANSFORMER
5	95-417	2ND I.F. TRANSFORMER
6	95-113	BAND SELECTOR SWITCH
7	95-114	VOLUME CONTROL SWITCH
8	95-418	POWER TUBES PLATING REFILL
9	95-454	POWER TUBES PLATING REFILL
10		

WAS NO.	REPT NO.	DESCRIPTION
A		VARIABLE TUNING
B		1ST I.F. TRANS. PRIMARY
C		1ST I.F. TRANS. SECONDARY
D		2ND I.F. TRANS. PRIMARY
E		2ND I.F. TRANS. SECONDARY
H		WAVE TRAP
J	22-518	BROADCAST OSCIL. (SEE NOTE)
K		ANTENNA BROADCAST (SEE NOTE)
L	22-305	BROADCAST OSCIL. (SEE NOTE)
N		SHORT WAVE DETECTOR
		SHORT WAVE OSCIL. (SEE NOTE)
		NOTE: TRANSFORMERS F-K & N MOUNTED ON CHASSIS
		STANDARD PART NO. 22-524

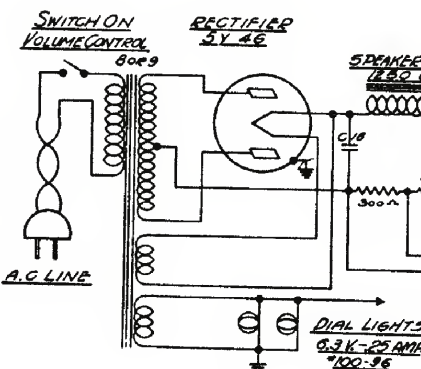

SPEAKERS MODELS
49-200-10 6-S-254
49-181-10 6-S-256

I.F. FREQUENCY 456 KC
6 TUBE SUPERHETERODYNE - 3 BAND
CHASSIS NO 5644

ZENITH RADIO CORPORATION